

Montageanleitung absolute Drehgeber WDGA EnDra®, SAE J1939 galv. getr.,

Assembly instructions for WDGA EnDra®, SAE J1939 galv. isol. absolute encoder, Instructions de montage, codeurs absolus WDGA EnDra®, SAE J1939 sep. galv., Istruzioni per l'uso trasduttore assoluto WDGA EnDra®, SAE J1939 galv. iso., Instrucciones de montaje codificador absoluto WDGA EnDra®, SAE J1939 sep. galv.






		-40 °C ... +80 °C (-40 °F ... +176 °F)
		-40 °C ... +100 °C (-40 °F ... +212 °F)

	Montage nur qualifiziertes Personal Assembly only qualified personnel Montage par qualifié personnel Montaggio solo personale qualificato Montaje solamente personal cualificado		
--	---	--	--

Power supply: Class 2/LPS only			

Sicherheitsmassnahmen/Safety instructions: Einsatz nur in Industrieumgebung und NICHT im sicherheitsrelevanten Bereich. Only for use in industrial environments and NOT for safety-relevant areas. Utilisation uniquement dans un environnement industriel et PAS dans un domaine lié à la sécurité. Utilízelo sólo en entornos industriales y NO en áreas relevantes para la seguridad. Utilizzare solo in ambienti industriali e NON in aree riguardanti la sicurezza.

Standard	F _r max.	F _a max.
WDGA58A WDGA58B Ø 6 mm Ø 8 mm Ø 10 mm Ø 3/8"	125 N 220 N	120 N 120 N
WDGA58D Ø 12 mm	400 N	400 N
WDGA58E	80 N	50 N

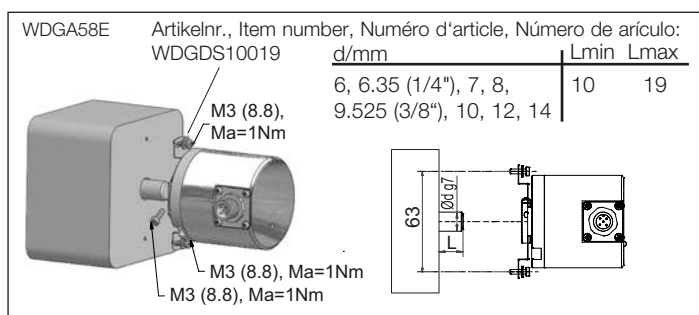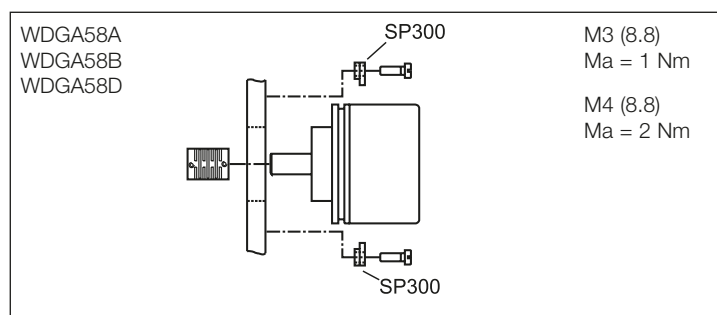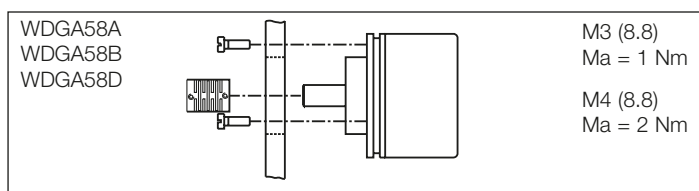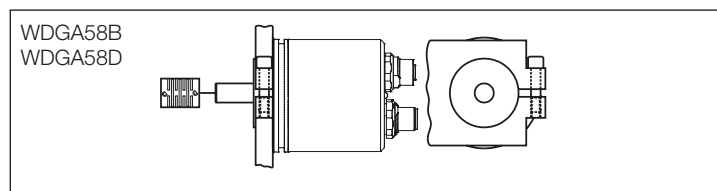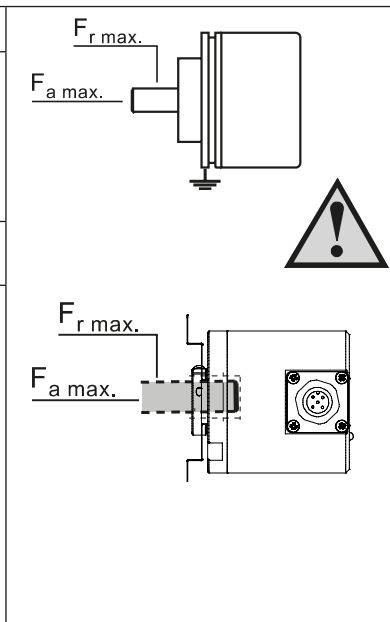

Übertragungsrates	max. Buslänge	max. Stichleitungslänge
Transmission rate	Max. bus length	Max. stub line length
Taux de transfert	Longueur max du port	Longueur max de la ligne d'accord
Velocità di trasferimento	Lunghezza massima bus	Lunghezza massima linea derivata
Velocidad de transmisión	Longitud máx. de bus	Longitud máx. línea de empalme
50 kBit/s	1000 m	7,5 m
100 kBit/s	500 m	3,75 m
250 kBit/s	270 m	1,5 m
500 kBit/s	100 m	0,75 m
1000 kBit/s	40 m	0,3 m

Definition	Steckerpin, Plug	Kabel, cable
Definition	pin, Connecteur	cable, Câble,
Definizione	points, Spinotto,	Cable, cavo
Definición	Pin conector	
U _B (10 VDC - 30 VDC)	2	br
Ground (GND)	3	wh
CAN _{High}	4	gn
CAN _{Low}	5	ye
CAN _{GND} /Schirm, Shield, Ecran, Pantalla, Schermo	1	Schirm

Kabel ø, cable, Câble, Cable, cavo	R1	R2	Temperatur, Temperature, Température, Temperatura
	66.4 mm	186.9 mm	T > -40 °C (-40 °F)